





SENSITIVITY	感 度
SENSITIVITY REDUCTION	感度遞減
FREQUENCY	頻 率
MAX. WORKING VOLTAGE	最大工作電壓
CURRENT CONSUMPTION	電流消耗
S/N RATIO	信 噪 比
STORAGE TEMPERATURE	儲存溫度
WEIGHT	重 量


Schematic Diagram 測定電路圖

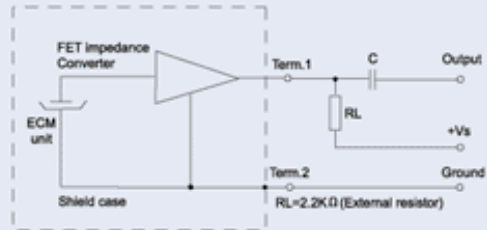

Dimensions (Unit: mm±0.2) 尺 寸 圖

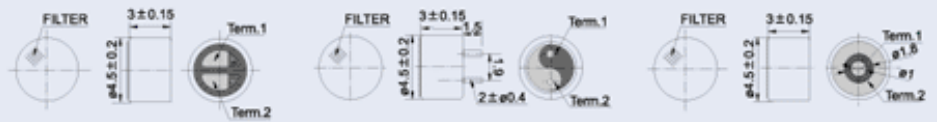

Typical Frequency Response Curve 頻率響應圖

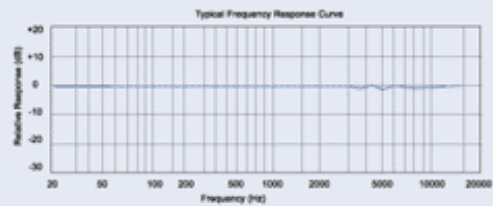

FEATURES

- Omnidirectional type
- Ultra thin
- For GSM, PDA....Dual Band applications

特色

- 全指向性
- 超薄
- 適用於GSM、PDA、雙頻機...等

OBO-40SN-5B

OBO-40KP-5B

OBO-40EN-5B

- Vs=2.0V, RL=2.2KΩ
- 38±3dB -40±3dB -42±3dB -44±3dB

F=1KHz 0dB=1V/Pa Within
-3dB at 1.5V compare to 3.0V

50~16,000Hz

Max. 10V

Max. 0.5mA

More than 60dB

-25°C to +70°C

Max. 1.0gm