




SENSITIVITY	靈敏度
SENSITIVITY REDUCTION	靈敏度減
FREQUENCY	頻率
MAX. WORKING VOLTAGE	最大工作電壓
CURRENT CONSUMPTION	電流消耗
S/N RATIO	信噪比
STORAGE TEMPERATURE	儲存溫度
WEIGHT	重量


Schematic Diagram 測定電路圖

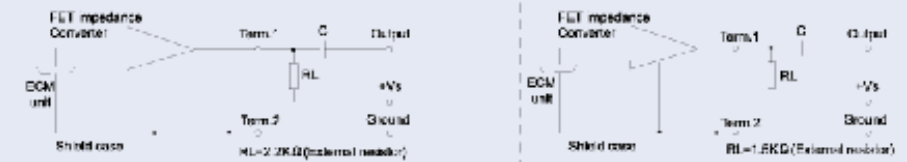

Dimensions (Unit: mm ± 0.2) 尺寸圖



Typical Frequency Response Curve 典型響應圖

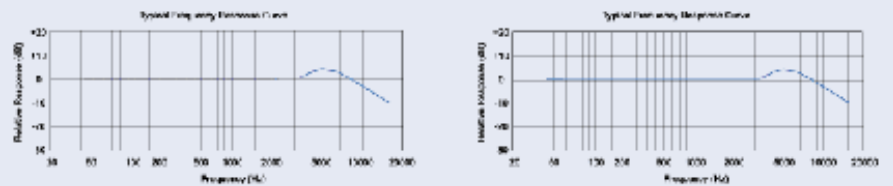

## FEATURES

- Omnidirectional type
- Useful for almost any type of telephone and other applications

## 特色

- 全指向性
- 適用於任何電話機或其他用途

### OBO-04FN-0B

□ Vs=4.5V, RL=2.2KΩ    □ Vs=1.5V, RL=1.5KΩ

□ -38 ± 3dB    □ -40 ± 3dB    □ -42 ± 3dB    □ -44 ± 3dB

F=1KHz 0dB=1V/Pa

Within -3dB at 1.5V compare to 3.0V

50~16,000Hz

Max. 10V

Max. 0.5mA

More than 60dB

-25°C to +70°C

Max. 1.0gm

### OBO-04FP-0B