



DIMENSIONS	尺寸
NOMINAL IMPEDANCE	阻值
POWER RATING	設定值
LOWEST RESONANT FREQUENCY	最低頻率
OUTPUT SOUND PRESSURE LEVEL (S.P.L.)	輸出音壓
FREQUENCY RANGE	頻率範圍
DISTORTION	失真程度
OPERATING TEMP. RANGE	操作溫度
STORAGE TEMP. RANGE	儲存溫度
WEIGHT	重量

Dimensions  
(Unit: ±0.3mm)  
納米尺寸圖

Frequency Response Curve  
(Distance: 0.5m)  
頻率響應圖

### APPLICATIONS


- Handy Video Games
- Computer Peripherals
- Electric Dictionary
- Computer Modems
- Communication Equipments

### 適用範圍


- 掌上型遊戲器
- 電腦周邊
- 電子字典
- 數據機
- 通訊設備

#### OBO-20008F-01

20.0mm X 3.0mm
8Ω ± 15% at 1,400Hz
Normal 200mW / Max. 400mW
700Hz ± 150Hz
75 ± 3dB / 200mW / 0.5Meter
Average at 1.0, 1.2, 1.5, 2.0KHz
400~8,500Hz Average SPL-10dB
5% Maximum at 1,400Hz, 200mW
-25°C to +50°C
-25°C to +55°C
2.5gms




HOUSING MATERIAL: METAL

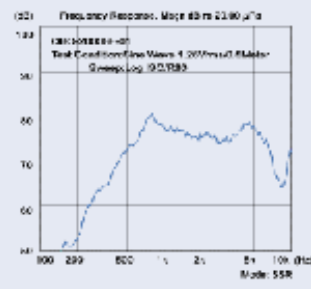

#### OBO-20008G-01

20mm X 4.3mm
8Ω ± 15% at 1,800Hz
Normal 100mW / Max. 200mW
900Hz ± 150Hz
75 ± 3dB / 100mW / 0.5Meter
Average at 1.0, 1.2, 1.5, 2.0KHz
700~7,500Hz Average SPL-10dB
5% Maximum at 1,400Hz, 100mW
-25°C to +50°C
-25°C to +55°C
1.7gms

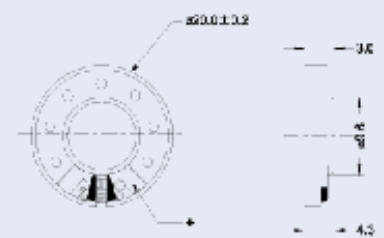

HOUSING MATERIAL: ABS

