



DIMENSIONS	尺寸
NOMINAL IMPEDANCE	阻值
POWER RATING	設定值
LOWEST RESONANT FREQUENCY	最低頻率
OUTPUT SOUND PRESSURE LEVEL (S.P.L.)	輸出聲壓
FREQUENCY RANGE	頻率範圍
DISTORTION	失真程度
OPERATING TEMP. RANGE	操作溫度
STORAGE TEMP. RANGE	儲存溫度
WEIGHT	重量

Dimensions  
(Unit: ±0.3mm)  
額定尺寸圖

Frequency Response Curve  
(Distance: 0.5m)  
頻率響應圖

## FEATURES


- Compact size, rich sound
- Notebook PC / LCD Monitor
- Multimedia Device

## 特色

- 輕小尺寸，高音質
- 應用於筆記型PC及LCD螢幕顯示器
- 多媒體設備

### OBO-25008K-01

25.0mm X 14mm
80 ± 15% at 1,000Hz / 1.0v
Normal 1 W / Max. 2W
600Hz ± 150Hz
81 ± 3dB / 1W / 0.5Meter
Average at 1.0, 1.2, 1.5, 2.0KHz
FC-20,000Hz Average SPL-10dB
5% Maximum at 1,400Hz. 100mW
-25°C to +50°C
-25°C to +55°C
1.7gms

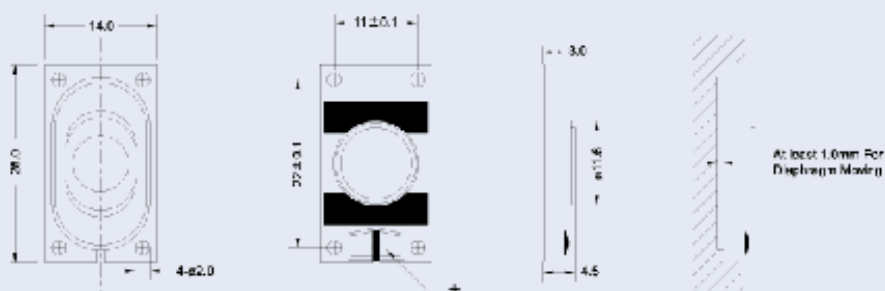

HOUSING MATERIAL : ABS

