



DIMENSIONS	尺寸
NOMINAL IMPEDANCE	阻值
POWER RATING	設定值
LOWEST RESONANT FREQUENCY	最低頻率
OUTPUT SOUND PRESSURE LEVEL (S.P.L.)	輸出聲壓
FREQUENCY RANGE	頻率範圍
DISTORTION	失真程度
OPERATING TEMP. RANGE	操作溫度
STORAGE TEMP. RANGE	儲存溫度
WEIGHT	重量

Dimensions
(Unit: ±0.3mm)
輪廓尺寸圖

Frequency Response Curve
(Distance: 0.5m)
頻率響應圖

APPLICATIONS

- Handy Video Games
- Computer Peripherals
- Electric Dictionary
- Computer Modems
- Communication Equipments

適用範圍


- 掌上型遊樂器
- 電腦周邊
- 電子字典
- 數據機
- 通訊設備

OBO-36008F-03

36.0mm×4.8mm
8Ω±15% at 1,200Hz/1.0V
Normal 500mW / Max. 1,000mW
530Hz±150Hz
86±3dB / 500mW / 0.5Meter
Average at 1.0, 1.2, 1.5, 2.0KHz
350~6,800Hz Average SPL-10dB
5% Maximum at 1,000Hz, 500mW
-25°C to +50°C
-25°C to +55°C
8.3gms

OBO-36016F-02

36.0mm×4.8mm
16Ω±15% at 1,000Hz/1.0V
Normal 500mW / Max. 1,000mW
530Hz±150Hz
85±3dB / 500mW / 0.5Meter
Average at 1.0, 1.2, 1.5, 2.0KHz
350~11,000Hz Average SPL-10dB
5% Maximum at 1,000Hz, 500mW
-25°C to +50°C
-25°C to +55°C
8.5gms

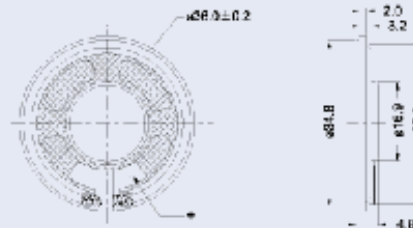

HOUSING MATERIAL: METAL

