



DIMENSIONS	尺寸
NOMINAL IMPEDANCE	阻值
POWER RATING	設定值
LOWEST RESONANT FREQUENCY	最低頻率
OUTPUT SOUND PRESSURE LEVEL (S.P.L.)	輸出音壓
FREQUENCY RANGE	頻率範圍
DISTORTION	失真程度
OPERATING TEMP. RANGE	操作溫度
STORAGE TEMP. RANGE	儲存溫度
WEIGHT	重量

### APPLICATIONS

- Handy Video Games
- Computer Peripherals
- Electric Dictionary
- Computer Modems
- Communication Equipments

### 適用範圍

- 掌上型遊戲器
- 電腦周邊
- 電子字典
- 數據機
- 通訊設備

#### OBO-36032F-01


36.0mm × 4.8mm
32Ω ± 15% at 1,000Hz / 1V
Normal 100mW / Max. 200mW
400Hz ± 150Hz
80 ± 3dB / 100mW / 0.5Meter
Average at 1.0, 1.2, 1.5, 2.0KHz
300~5,000Hz Average SPL-10dB
5% Maximum at 1,000Hz, 100mW
-25°C to +50°C
-25°C to +55°C
8.5gms

#### OBO-36025F-01

36.0mm × 4.8mm
25Ω ± 15% at 1,000Hz
Normal 200mW / Max. 500mW
500Hz ± 150Hz
83 ± 3dB / 200mW / 0.5Meter
Average at 0.8, 1.0, 1.2, 1.5KHz
320~7,200Hz Average SPL-10dB
5% Maximum at 1,000Hz, 200mW
-25°C to +50°C
-25°C to +55°C
8.5gms

http://www.pro2.com.tw

Dimensions  
(Unit: ±0.3mm)  
規格尺寸圖

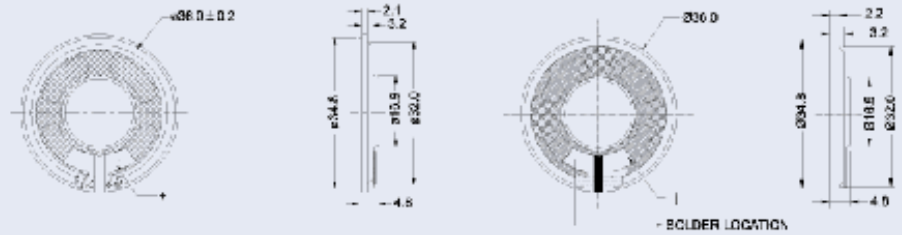

HOUSING MATERIAL: METAL

Frequency Response Curve  
(Distance: 0.5m)  
頻率響應圖

