

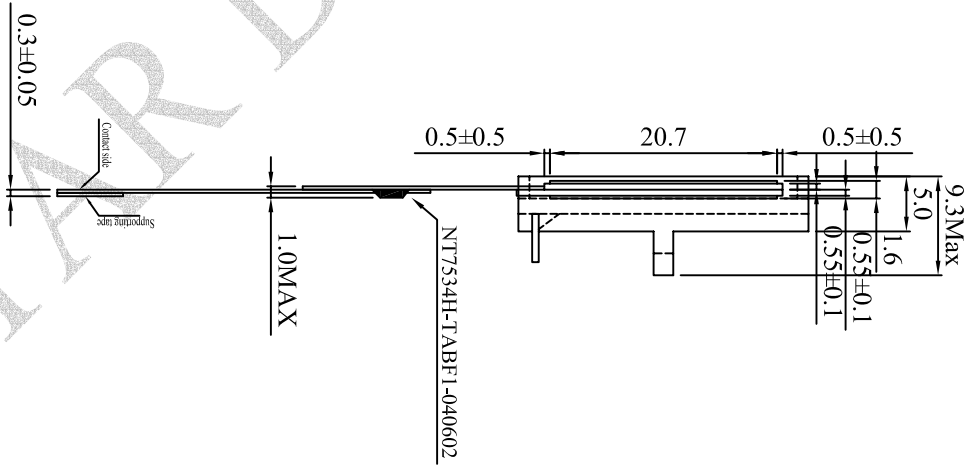


1	Lcd Type	FSTN White
2	Viewing Direction	6H
3	Drive Method	1/64 DUTY, 1/9 BIAS
4	Operating Voltage(LCD)	9.1V
5	Polstrizer Mode	Positive Transflective
6	Operating Temperature	-20°C ~ 70°C
7	Storage Temperature	-30°C ~ 80°C

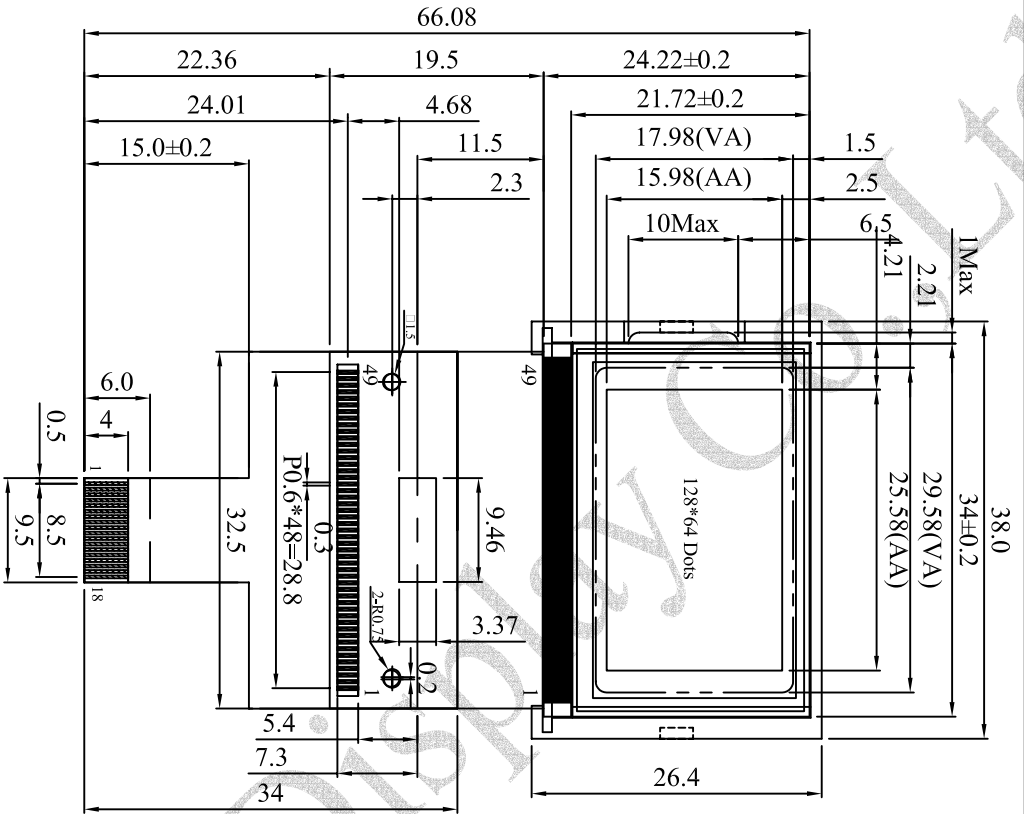

PIN NO.	SYMBOL
1	VDD
2	VSS
3	CS1B
4	CS2
5	RES
6	A0
7	R/W
8	E
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	C86
18	P/S

The non-specified tolerance of dimension is ±0.2 mm.



SCALE:	3/2	REV:	0	華凌光電股份有限公司	
UNIT:	mm	PAGE:	1/1	WINSTAR DISPLAY CO.	
APPROVE		MODEL	WX12864T1-TFH#	LCD DRAWING	
CHECK		TITLE	LCD DRAWING	DWG NO. T-970710	
DRAW	何群英	DATE	7/03/08		