



300 Watt Series

Desktop Type


Features :

- IEC/EN/UL 62368-1 3rd Edition
- 100-240VAC Universal Input
- Regulated Output With Low Ripple Noise
- Safety Agency Requirements and EMI/EMS Certified
- Modified and Custom Design Available
- 1 Year Warranty

Input

Voltage	100-240VAC
Line Frequency	50-60Hz
Current	3.5A Max.
Protection	Internal Primary Current Fuse
Configuration	IEC60320/C14

Derating Curve

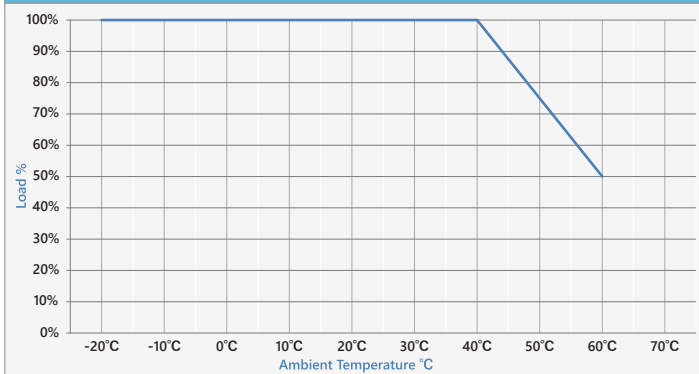

Output

Load Regulation	±5% (Typical)
Ripple & Noise	≤ 1% Vp-p @ Full Load
Transient (Dynamic) Response	0.5mS with 50% Load Change
Start-up Time	< 3,000mS
Hold-up Time	≥ 10mS @ Full Load
Rise Time	< 50mS
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection / Over Temperature Protection

Electrical

Topology	LLC
Dielectric Withstand	3,000VAC Primary - Secondary
Earth Leakage Current	< 5mA
Efficiency	DoE Level VI
EMC Standards	EN55032 EN61000-3-2,3 EN55035
MTBF	300,000 Calculated Hours at 25°C , by Telcordia SR-332

Environmental

Operating Temperature	-20 to + 40°C
Storage Temperature	-20 to + 80°C
Operating Altitude	5,000M
Relative Humidity	Operating : 20 to 80% RH Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

Mechanical

Case Dimension	L 204 × W 94 × H 43.5 (mm)
Weight	1,110g (Ref.)



I.T.E.

Medical



600 Watt Series

Desktop Type


Features :

- IEC/EN/UL 62368-1 3rd Edition
- 100-240 VAC Universal Input
- Efficiency up to 96%
- Regulated Output with Low Ripple Noise
- Modified and Custom Design Available
- 2 Years Warranty

Input

Voltage	100-240VAC
Line Frequency	50-60Hz
Current	7A Max.
Protection	Internal Primary Current Fuse
Configuration	IEC60320/C14

Derating Curve

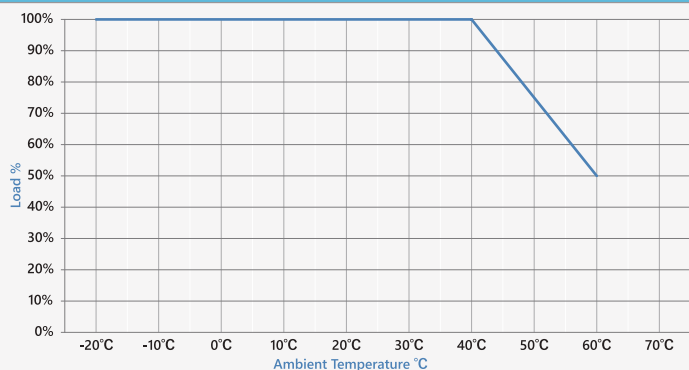

Output

Load Regulation	±5% (Typical)
Ripple & Noise	≤ 1% Vp-p @ Full Load
Transient (Dynamic) Response	0.5mS with 50% Load Change
Start-up Time	< 3,500mS
Hold-up Time	≥ 10mS @ Full Load
Rise Time	< 50mS
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection / Over Temperature Protection

Electrical

Topology	LLC
Dielectric Withstand	4,000VAC Primary - Secondary
Touch Current (Patient) Leakage Current	< 100μA
Earth Leakage Current	< 5mA
EMC Standards	EN55032 / EN55011 EN61000-3-2,3 EN55035 / EN61000-4-2,3,4,5,6,8,11
MTBF	300,000 Calculated Hours at 25°C , by Telcordia SR-332

Environmental

Operating Temperature	-20 to + 40°C
Storage Temperature	-20 to + 80°C
Operating Altitude	5,000M
Relative Humidity	Operating : 20 to 80% RH Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

Mechanical

Case Dimension	L 254 × W 119 × H 50.5 (mm)
Weight	2,100g (Ref.)




Features :

- IEC/EN/UL 62368-1
- 100-240 VAC Universal Input
- Gallium Nitride Based Design
- High Power Density : 12.5W / in³
- With 250kHz Switching Frequency
- Efficiency up to 95%
- Regulated Output with Low Ripple Noise
- Modified and Custom Design Available
- 1 Year Warranty

Input

Voltage	100-240VAC
Line Frequency	50-60Hz
Current	2.4A Max.
Protection	Internal Primary Current Fuse
Configuration	IEC60320/C6, C8, C14

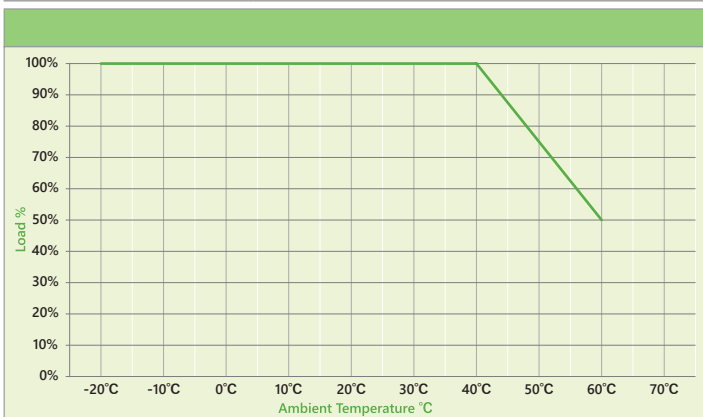

GaN FET Technology 200 Watt Series

Small Size Desktop Type

Output

Load Regulation	±5% (Typical)
Ripple & Noise	≤ 1% Vp-p @ Full Load
Transient (Dynamic) Response	0.5mS with 50% Load Change
Start-up Time	< 3,000mS
Hold-up Time	≥ 10mS @ Full Load
Rise Time	< 50mS
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection / Over Temperature Protection

Electrical

Topology	LLC
Dielectric Withstand	3,000VAC Primary - Secondary
Leakage Current	< 0.5mA @ 2Pin / < 5mA @ 3Pin
Efficiency	DoE Level VI, ErP Stage 2, CoC Tier 2
EMC Standards	EN55032 EN61000-3-2,3 EN55035
MTBF	300,000 Calculated Hours at 25°C , by Telcordia SR-332

Environmental

Operating Temperature	-20 to + 40°C
Storage Temperature	-20 to + 80°C
Operating Altitude	5,000M
Relative Humidity	Operating : 20 to 80% RH Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

Mechanical

Case Dimension	C6 & C14 - L 161 × W 54.2 × H 33.2 (mm) C8 - L 150 × W 54 × H 33 (mm)
Weight	560g (Ref.)




Features :

- IEC/EN/ANSI/AAMI ES60601-1 (Edition 3.2)
- IEC/EN/ANSI/AAMI HA60601-1-11 (Class II Only)
- EMC : IEC60601-1-2 (Edition 4.1)
- 100-240 VAC Universal Input
- Gallium Nitride Based Design
- High Power Density : 11W / in³
- With 250kHz Switching Frequency
- Means of Protection: 2 X MOPP
- Efficiency up to 95%
- Regulated Output with Low Ripple Noise
- Modified and Custom Design Available
- 2 Years Warranty

Input

Voltage	100-240VAC
Line Frequency	50-60Hz
Current	2.4A-0.9A
Protection	Internal Primary Current Fuse
Configuration	IEC60320/C6, C8, C14, C18

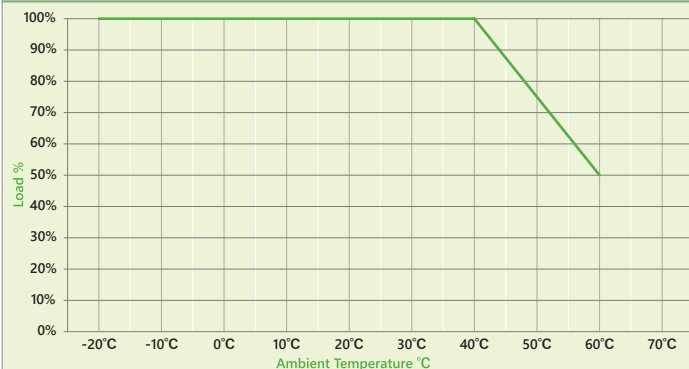

GaN FET Technology 200 Watt Series

Small Size Desktop Type

Output

Load Regulation	±5% (Typical)
Ripple & Noise	≤ 1% Vp-p @ Full Load
Transient (Dynamic) Response	0.5mS with 50% Load Change
Start-up Time	< 3,000mS
Hold-up Time	≥ 10mS @ Full Load
Rise Time	< 50mS
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection / Over Temperature Protection

Electrical

Topology	LLC
Dielectric Withstand	4,000VAC Primary - Secondary
Touch Current (Patient) Leakage Current	< 100μA
Earth Leakage Current	< 5mA
Efficiency	DoE Level VI, ErP Stage 2, CoC Tier 2
EMC Standards	EN55011
	EN61000-3-2,3
	EN61000-4-2,3,4,5,6,8,11
MTBF	300,000 Calculated Hours at 25°C , by Telcordia SR-332

Environmental

Operating Temperature	-20 to + 40°C
Storage Temperature	-20 to + 80°C
Operating Altitude	5,000M
Relative Humidity	Operating : 20 to 80% RH
	Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

Mechanical

Case Dimension	L 166.5 × W 54.2 × H 33 (mm)
Weight	620g (Ref.)



GaN FET Technology 250 Watt Series

Small Size Desktop Type

Features :

- IEC/EN/ANSI/AAMI ES60601-1 (Edition 3.2)
- IEC/EN/ANSI/AAMI HA60601-1-11 (Class II Only)
- EMC : IEC60601-1-2 (Edition 4.1)
- IEC/EN/UL 62368-1 3rd Edition
- 100-240 VAC Universal Input
- Gallium Nitride Based Design
- High Power Density : 11W / in³
- With 250kHz Switching Frequency
- Means of Protection: 2 X MOPP
- Efficiency up to 95%
- Regulated Output with Low Ripple Noise
- Modified and Custom Design Available
- 2 Years Warranty

Output

Load Regulation	±5% (Typical)
Ripple & Noise	≤ 1% Vp-p @ Full Load
Transient (Dynamic) Response	0.5mS with 50% Load Change
Start-up Time	< 3,000mS
Hold-up Time	≥ 10mS @ Full Load
Rise Time	< 50mS
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection / Over Temperature Protection


Electrical

Topology	LLC
Dielectric Withstand	4,000VAC Primary - Secondary
Touch Current (Patient) Leakage Current	< 100μA
Earth Leakage Current	< 5mA
Efficiency	DoE Level VI, ErP Stage 2, CoC Tier 2
EMC Standards	EN55032 / EN55011
	EN61000-3-2,3
MTBF	EN55035 / EN61000-4-2,3,4,5,6,8,11
	300,000 Calculated Hours at 25°C , by Telcordia SR-332

Input

Voltage	100-240VAC
Line Frequency	50-60Hz
Current	2.9A-1.3A
Protection	Internal Primary Current Fuse
Configuration	IEC60320/C14, C18

Derating Curve

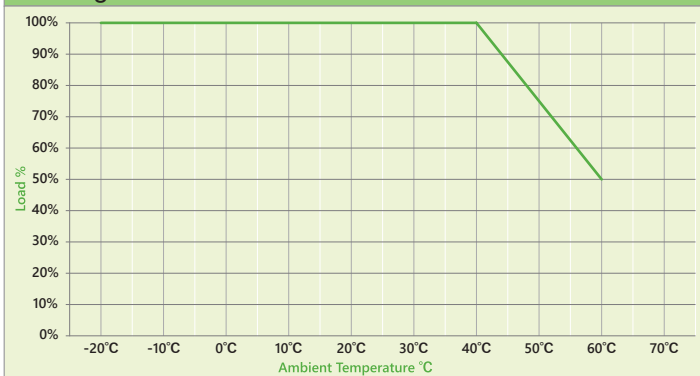

Environmental

Operating Temperature	-20 to + 40°C
Storage Temperature	-20 to + 80°C
Operating Altitude	5,000M
Relative Humidity	Operating : 20 to 80% RH
	Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

Mechanical

Case Dimension	L 173 × W 67 × H 32.1 (mm)
Weight	855g (Ref.)




Features :

- IEC/EN/UL 62368-1 3rd Edition
- 100-240 VAC Universal Input
- Gallium Nitride Based Design
- High Power Density : 12.6W / in³
- Height : Less than 1"
- Efficiency up to 95%
- Regulated Output with Low Ripple Noise
- Modified and Custom Design Available
- 1 Year Warranty

Input

Voltage	100-240VAC
Line Frequency	50-60Hz
Current	3.5A Max.
Protection	Internal Primary Current Fuse
Configuration	IEC60320/C14

Derating Curve

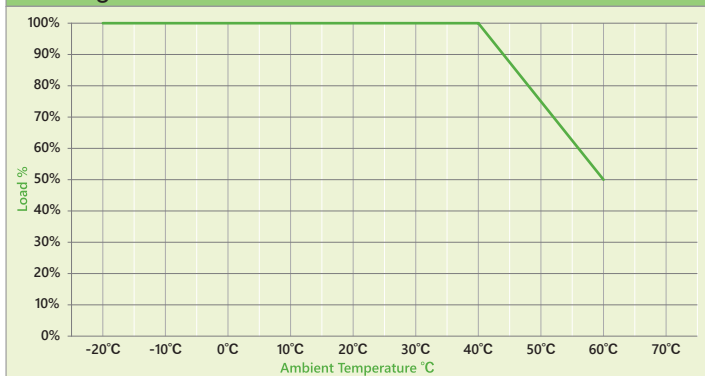

GaN FET Technology 270 Watt Series

Slim Size Desktop Type

Output

Load Regulation	±5% (Typical)
Ripple & Noise	≤ 1% Vp-p @ Full Load
Transient (Dynamic) Response	0.5mS with 50% Load Change
Start-up Time	< 3,000mS
Hold-up Time	≥ 10mS @ Full Load
Rise Time	< 50mS
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection / Over Temperature Protection

Electrical

Topology	LLC
Dielectric Withstand	3,000VAC Primary - Secondary
Earth Leakage Current	< 5mA
Efficiency	DoE Level VI
EMC Standards	EN55032
	EN61000-3-2,3
	EN55035
MTBF	300,000 Calculated Hours at 25°C , by Telcordia SR-332

Environmental

Operating Temperature	-20 to + 40°C
Storage Temperature	-20 to + 80°C
Operating Altitude	5,000M
Relative Humidity	Operating : 20 to 80% RH
	Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

Mechanical

Case Dimension	L 170 × W 84.3 × H 24.5 (mm)
Weight	630g (Ref.)



Features :

- IEC/EN/ANSI/AAMI ES60601-1 (Edition 3.2)
- IEC/EN/ANSI/AAMI HA60601-1-11 (Class II Only)
- EMC : IEC60601-1-2 (Edition 4.1)
- IEC/EN/UL 62368-1 3rd Edition
- 100-240 VAC Universal Input
- Gallium Nitride Based Design
- High Power Density : 9W / in³
- With 200kHz Switching Frequency
- Means of Protection: 2 X MOPP
- Efficiency up to 95%
- Regulated Output with Low Ripple Noise
- Modified and Custom Design Available
- 2 Years Warranty

GaN FET Technology 300 Watt Series

Small Size Desktop Type

Input

Voltage	100-240VAC
Line Frequency	50-60Hz
Current	3.5A-1.5A
Protection	Internal Primary Current Fuse
Configuration	IEC60320/C14, C18

Output

Load Regulation	±5% (Typical)
Ripple & Noise	≤ 1% Vp-p @ Full Load
Transient (Dynamic) Response	0.5mS with 50% Load Change
Start-up Time	< 3,000mS
Hold-up Time	≥ 10mS @ Full Load
Rise Time	< 50mS
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection / Over Temperature Protection

Electrical

Topology	LLC
Dielectric Withstand	4,000VAC Primary - Secondary
Touch Current (Patient) Leakage Current	< 100μA
Earth Leakage Current	< 5mA
Efficiency	DoE Level VI
EMC Standards	EN55032 / EN55011
	EN61000-3-2,3
	EN55035 / EN61000-4-2,3,4,5,6,8,11
MTBF	300,000 Calculated Hours at 25°C , by Telcordia SR-332


Environmental

Operating Temperature	-20 to + 40°C
Storage Temperature	-20 to + 80°C
Operating Altitude	5,000M
Relative Humidity	Operating : 20 to 80% RH
	Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

Mechanical

Case Dimension	L 183 × W 85 × H 35 (mm)
Weight	1,060g (Ref.)

Derating Curve

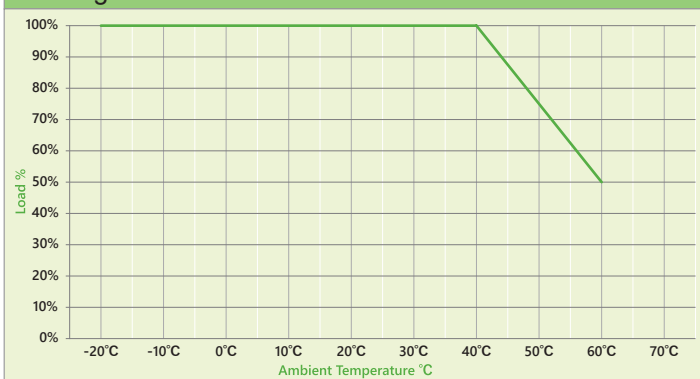



GaN FET Technology 450 Watt Series


Desktop Type

Features :

- IEC/EN/ANSI/AAMI ES60601-1 (Edition 3.2)
- EMC : IEC60601-1-2 (Edition 4.1)
- IEC/EN/UL 62368-1 3rd Edition
- 100-240 VAC Universal Input
- Gallium Nitride Based Design
- Means of Protection: 2 X MOPP
- Efficiency up to 95%
- Regulated Output with Low Ripple Noise
- Modified and Custom Design Available
- 2 Years Warranty

Input	
Voltage	100-240VAC
Line Frequency	50-60Hz
Current	5.3A-2.2A
Protection	Internal Primary Current Fuse
Configuration	IEC60320/C14

Derating Curve

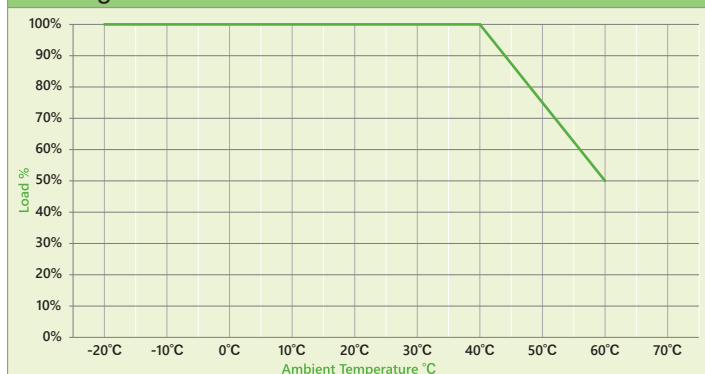

Output	
Load Regulation	±5% (Typical)
Ripple & Noise	≤ 1% Vp-p @ Full Load
Transient (Dynamic) Response	0.5mS with 50% Load Change
Start-up Time	< 3,000mS
Hold-up Time	≥ 10mS @ Full Load
Rise Time	< 50mS
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection / Over Temperature Protection

Electrical	
Topology	LLC
Dielectric Withstand	4,000VAC Primary - Secondary
Touch Current (Patient) Leakage Current	< 100μA
Earth Leakage Current	< 5mA
Efficiency	DoE Level VI
EMC Standards	EN55032 / EN55011
	EN61000-3-2,3
	EN55035 / EN61000-4-2,3,4,5,6,8,11
MTBF	300,000 Calculated Hours at 25°C , by Telcordia SR-332

Environmental	
Operating Temperature	-20 to + 40°C
Storage Temperature	-20 to + 80°C
Operating Altitude	5,000M
Relative Humidity	Operating : 20 to 80% RH
	Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

Mechanical	
Case Dimension	L 254 × W 116 × H 47 (mm)
Weight	1,600g (Ref.)